

## 6TE PNEUMATIC SPOOLER



## 6TE PNEUMATIC SPOOLER

Brimmond's 6Te Air Powered Spooler can be used either onshore or offshore to provide a variety of spooling solutions, including:

- General spooling
- Wire rope spooling
- BOP MUX cable spooling
- Hydraulic umbilical spooling

Brimmond offer a range of complimentary equipment for rental; contact our hire team to find out how we can help you. For special projects, we offer a bespoke design solution, tailored to your requirements.

Toftills Avenue, Midmill Business Park,  
Kintore, Aberdeenshire, Scotland, AB51 0QP, UK

+44 (0) 1467 633805  
info@brimmond.com



www.brimmond.com

## WORK AREA CLASSIFICATION


**CE** Suitable for safe area use only

## TECHNICAL SPECIFICATION - STANDARD SUPPLY

<b>AIR SUPPLY REQUIREMENTS</b>	Minimum 60 PSI @ 150 SCFM Maximum 110 PSI @ 150 SCFM
<b>AIR CONNECTION</b>	1" "Crow's foot", c/w FRL and isolation valve
<b>LINE PULL</b>	3,000 kgs
<b>DRUM CAPACITY</b>	BG-SPP-010 - Ø2800mm flange x 2500mm width. Max drum weight 6,000 kgs BG-SPP-011 - Ø3000mm flange x 2500mm width. Max drum weight 6,000 kgs
<b>DRUM CLAMPING</b>	Manual drum clamp on shaft
<b>SHAFT OPTIONS</b>	75mm full length solid shaft, c/w step-ups to 125mm
<b>DRIVE</b>	Globe RM510 air motor, c/w gearbox and split drive coupling
<b>CONTROL PANEL</b>	Air supply pressure gauge Tension pressure gauge Emergency stop Directional control valve Line pull pressure adjust Visual warning indicators
<b>SAFETY FEATURES</b>	Control panel remotely mounted from unit Interlock on drive coupling guard – spooler will not operate with guard open Failsafe brake
<b>MOVING &amp; HANDLING</b>	Frame tested in accordance with BSEN-12079 Forklift pockets Certified sling set
<b>DECK FASTENING</b>	Lashing rings
<b>DIMENSIONS</b>	BG-SPP-010 - 4437mm (L) x 1500mm (W) x 1871mm (H) BG-SPP-011 - 4250mm (L) x 1800mm (W) x 2000mm (H)
<b>WEIGHT</b>	Gross 4,000 kg

## MAIN DIMENSIONS

BG-SPP-010

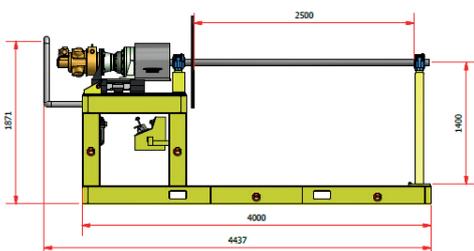

BG-SPP-011

