

75TE SPOOLER



75TE SPOOLER

Brimmond's Diesel Powered 75Te Spooler can be used onshore or offshore to provide a variety of spooling solutions, including:

- ROV umbilical back tension spooling
- BOP MUX cable spooling
- Wire rope spooling
- Hydraulic umbilical spooling

Brimmond offer a range of complimentary equipment for rental; contact our hire team to find out how we can help you. For special projects, we offer a bespoke design solution, tailored to your requirements.

Toftthills Avenue, Midmill Business Park,
Kintore, Aberdeenshire, Scotland, AB51 0QP, UK

+44 (0) 1467 633805
info@brimmond.com



www.brimmond.com



WORK AREA CLASSIFICATION

CE Suitable for safe area use only

TECHNICAL SPECIFICATION - STANDARD SUPPLY

| | |
|-------------------|---|
| DRUM CAPACITY | Ø4000mm x 4000mm wide |
| DRUM CLAMPING | 2x hydraulic cylinders pulling non-driven end support |
| SHAFT OPTIONS | Ø1200mm x 4000mm wide Ø1000mm x 4000mm wide Ø1500mm x 3000mm wide |
| DRIVE | Hydraulically retractable drive unit with split drive coupling |
| CONTROL PANEL | Drive engage Drive direction Brake Back tension adjust Back tension pressure Brake pressure System pressure |
| LIGHTING | Pop-up LED work lights illuminate the immediate working area LED lighting in engine bay for ease of maintenance |
| SAFETY FEATURES | Remote Emergency Stop |
| MOVING & HANDLING | 4-leg certified sling set Forklift pockets |
| DECK FASTENING | Sacrificial weld down plates |
| DIMENSIONS | 6136mm (L) x 2363mm (W) x 2757mm (H) |
| WEIGHT | Gross 8,000 kgs |

MAIN DIMENSIONS

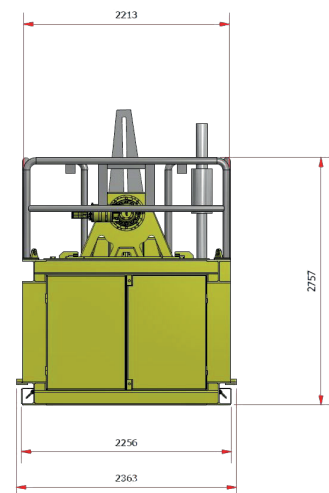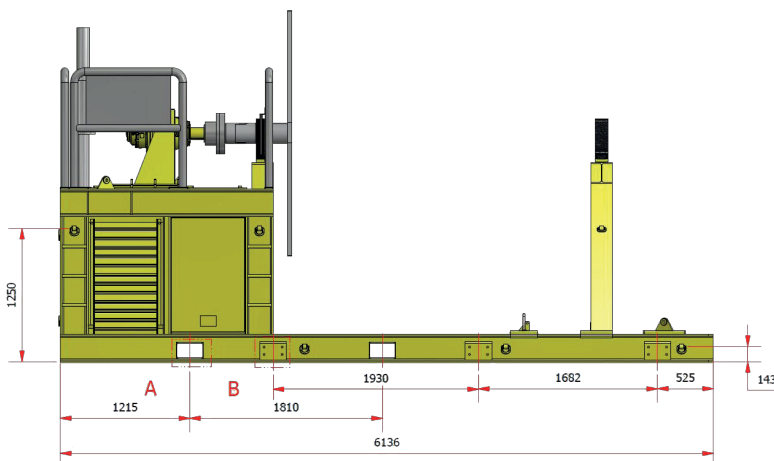

All information is correct at the time of printing. Brimmond reserves the right to make any changes to the above specification, without prior notice, with no impact on the overall unit performance.