


DUAL VESSEL FILTER UNIT

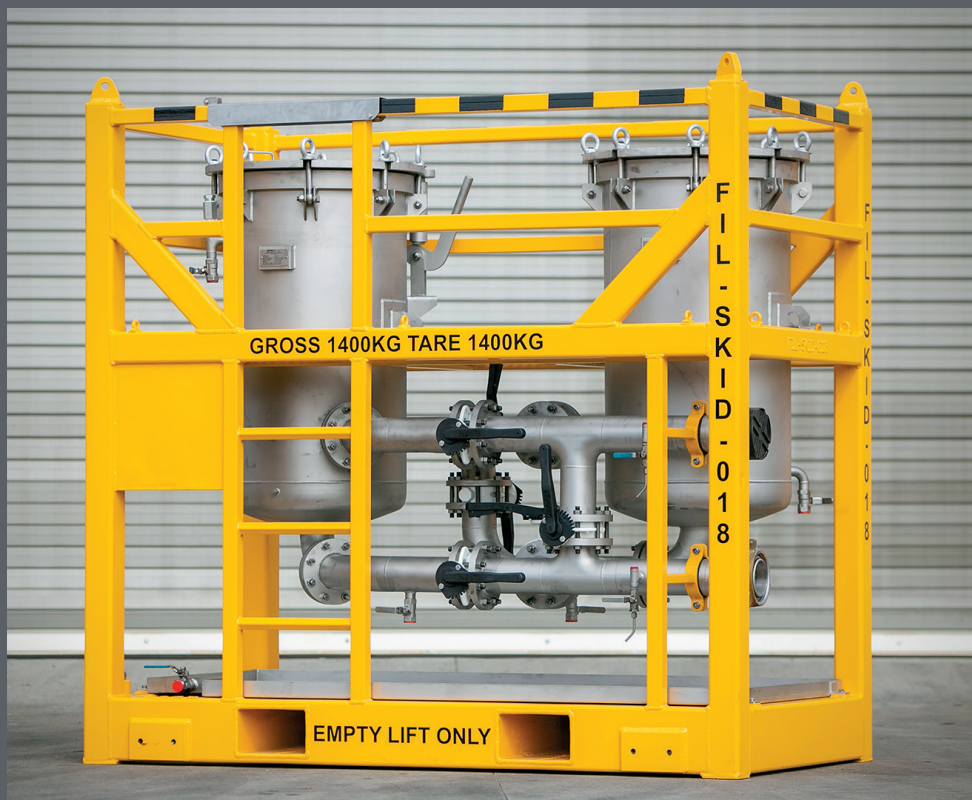

DUAL FILTER FILTER UNIT

Brimmond's Dual Vessel Filter can be used for a variety of products and applications such as:

- Oil flushing
- Completion fluids
- Work over fluids
- Produced water
- Pipeline flushing
- Oil removal

Brimmond offer a range of complimentary equipment for rental; contact our hire team to find out how we can help you. For special projects, we offer a bespoke design solution, tailored to your requirements.

Toftthills Avenue, Midmill Business Park,
Kintore, Aberdeenshire, Scotland, AB51 0QP, UK

+44 (0) 1467 633805
info@brimmond.com



www.brimmond.com


WORK AREA CLASSIFICATION

CE Safe Area use only

TECHNICAL SPECIFICATION - STANDARD SUPPLY

DESIGN PRESSURE	7 bar
MAXIMUM FLOW	18 bbl/min (172 m3/hr)
DESIGN TEMPERATURE	-20°C to 70°C
VOLUME	2 x 260L
PED CATEGORY/MODULE	Art.3.3/SEP
PED MEDIUM GROUP	GR.2, Liquids
FILTER ELEMENTS	50 cartridges or 4 bags per vessel
INLET/OUTLET CONNECTIONS	316 SS 4" Fig 100
SAFETY FEATURES	Integrated safety railing, ladder and service platform Pressure relief valve
MOVING & HANDLING	DNV2.7-1/EN12079 certified frame 4 leg certified sling set Forklift pockets
DIMENSIONS	2250mm (L) 1200mm (W) 2200mm (H)
WEIGHT	1600kg

MAIN DIMENSIONS

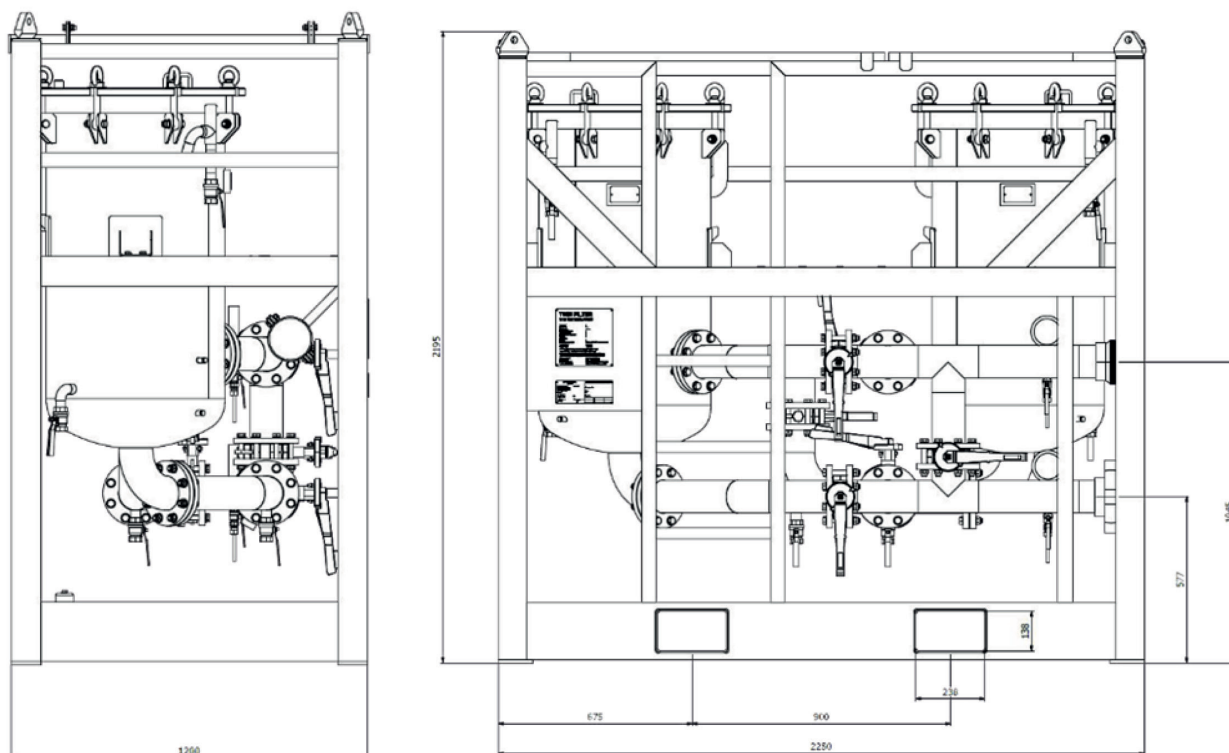

All information is correct at the time of printing. Brimmond reserves the right to make any changes to the above specification, without prior notice, with no impact on the overall unit performance.