
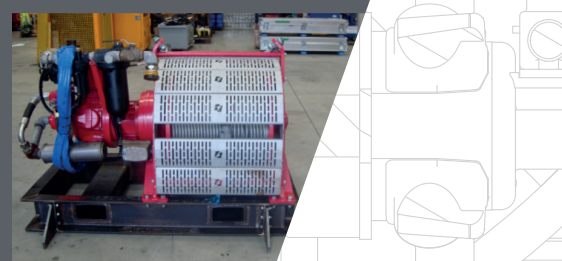


5TE AIR WINCH - ATEX ZONE 2

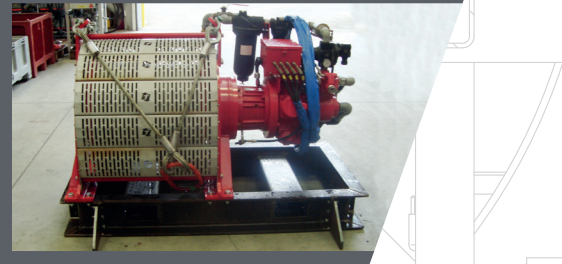

5TE AIR WINCH - ATEX ZONE 2

Brimmond's 5Te Air Winch can be used either onshore or offshore for a variety of products such as:

- Deployment and recovery of equipment
- General deck use

Brimmond offer a range of complimentary equipment for rental; contact our hire team to find out how we can help you. For special projects, we offer a bespoke design solution, tailored to your requirements.

Tofthills Avenue, Midmill Business Park,
Kintore, Aberdeenshire, Scotland, AB51 0QP, UK

+44 (0) 1467 633805
info@brimmond.com



www.brimmond.com

WORK AREA CLASSIFICATION



TECHNICAL SPECIFICATION - STANDARD SUPPLY

AIR MOTOR TYPE	TA5 series piston air motor
GEARBOX TYPE	TA5 planetary gear reducer
AIR SUPPLY REQUIREMENTS	75 PSI @ 700 SCFM
DRUM DIMENSIONS	Core $\varnothing = 412\text{mm}$ Flange $\varnothing = 712\text{mm}$ Width = 610mm
DRUM SPEED (MAXIMUM)	16.3m/s
LINE PULL	4,989kg
CONTROL FUNCTIONS	Directional control valve Air regulator
SAFETY FEATURES	Automatic disk brake Emergency stop Drum guard
MOVING & HANDLING	2-leg certified sling set Forklift pockets
DECK FASTENING	Sacrificial weld down plates
DIMENSIONS (ON BASE)	1800mm (L) 890mm (W) 1200mm (H)
WEIGHT (ON BASE)	1200kg

MAIN DIMENSIONS

