


2800L HEATED TANK - ATEX ZONE 1

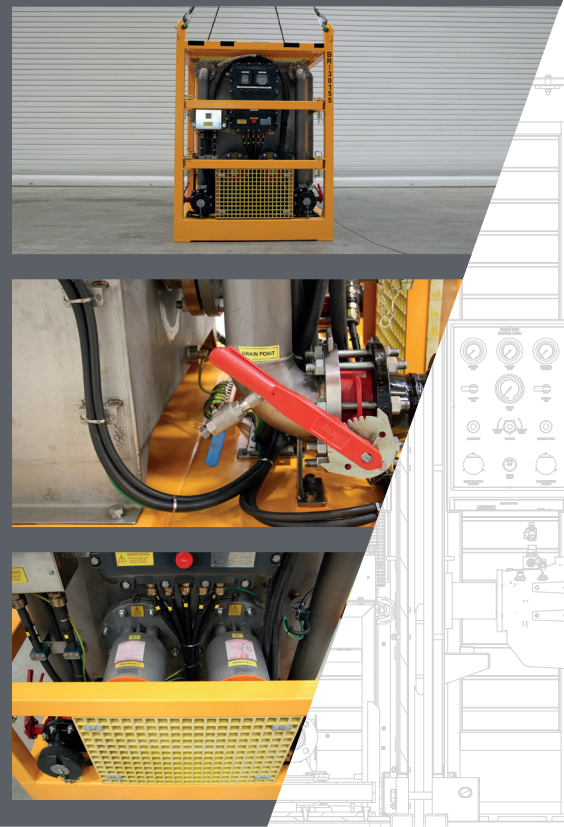

2800L HEATED TANK - ATEX ZONE 1

Brimmond's 2800L Heated Tanks can be used either onshore or offshore to heat process media used for:

- Hot oil flushing
- Chemical cleaning
- Process & pipeline operations
- Chemical flushing

Brimmond offer a range of complimentary equipment for rental; contact our hire team to find out how we can help you. For special projects, we offer a bespoke design solution, tailored to your requirements.


Toftills Avenue, Midmill Business Park,
Kintore, Aberdeenshire, Scotland, AB51 0QP, UK

+44 (0) 1467 633805
info@brimmond.com



www.brimmond.com

WORK AREA CLASSIFICATION




 Group II Category 2 (Zone 1) Gas Group IIB
 Temperature Class T4

TECHNICAL SPECIFICATION - STANDARD SUPPLY

TANK CAPACITY	2800 litres (100% capacity) 304 SS
ELECTRICAL REQUIREMENTS	380-440V, 3 Phase, 50-60Hz
PORTS	Inlet - 2 x 4" Fig 206 Female Hammer Lug Union Outlet - 2 x 4" Fig 206 Male Hammer Lug Union Additional options available on request
HEATERS	4 x 11kW, mild steel elements (other elements materials available on request)
FLUID TYPE	Hydraulic oil, glycol, other fluids available on request
INSTRUMENTATION	Analogue temperature gauge Sight level gauge
CONTROL PANEL	Mains isolator Individual heater isolators
SAFETY FEATURES	Low level shut down Thermostatically controlled heaters Individual heater high temperature trip
DECK CABLE	30 metre (when new)
MOVING & HANDLING	DNV 2.7-3 certified frame 4-leg certified sling set Forklift pockets
DIMENSIONS	2500mm (L) x 1500mm (W) x 2090mm (H)
GROSS WEIGHT	Gross 4,500kg

MAIN DIMENSIONS

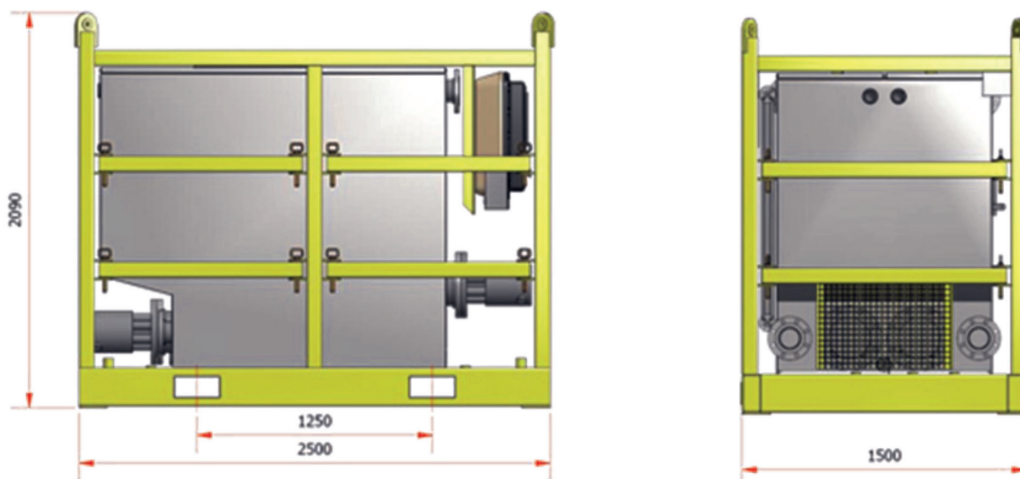

All information is correct at the time of printing. Brimmond reserves the right to make any changes to the above specification, without prior notice, with no impact on the overall unit performance.