


1" FLUID MANIFOLDS

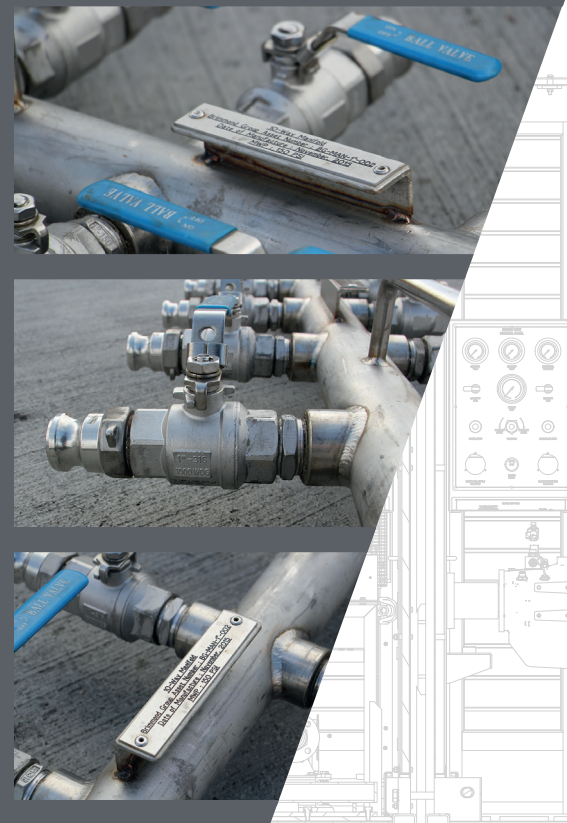

1" FLUID MANIFOLDS

Brimmond's range of lightweight, stainless steel fluid manifolds can be used either onshore or offshore for applications such as:

- Hot oil flushing
- Chemical cleaning
- Pipeline flooding
- Well testing
- Tank cleaning
- Fluid transfer

Brimmond offer a range of complimentary equipment for rental; contact our hire team to find out how we can help you. For special projects, we offer a bespoke design solution, tailored to your requirements.

Toftthills Avenue, Midmill Business Park,
Kintore, Aberdeenshire, Scotland, AB51 0QP, UK

+44 (0) 1467 633805
info@brimmond.com




www.brimmond.com

TECHNICAL SPECIFICATION - STANDARD SUPPLY

NUMBER & TYPE OF VALVES	10 x 1" quarter turn full port 316 stainless steel ball valve
PROCESS CONNECTIONS	Options: 10 x 1" Camlock 10 x 1" BSPP Male
PROCESS MEDIA	Water, oil, fluids
PIPE SIZE	2" SCH 30 stainless steel
MAXIMUM WORKING PRESSURE	150psi
MOVING & HANDLING	Handles, foot plates
DIMENSIONS	1208mm x 463mm x 155mm
WEIGHT	20kg

MAIN DIMENSIONS

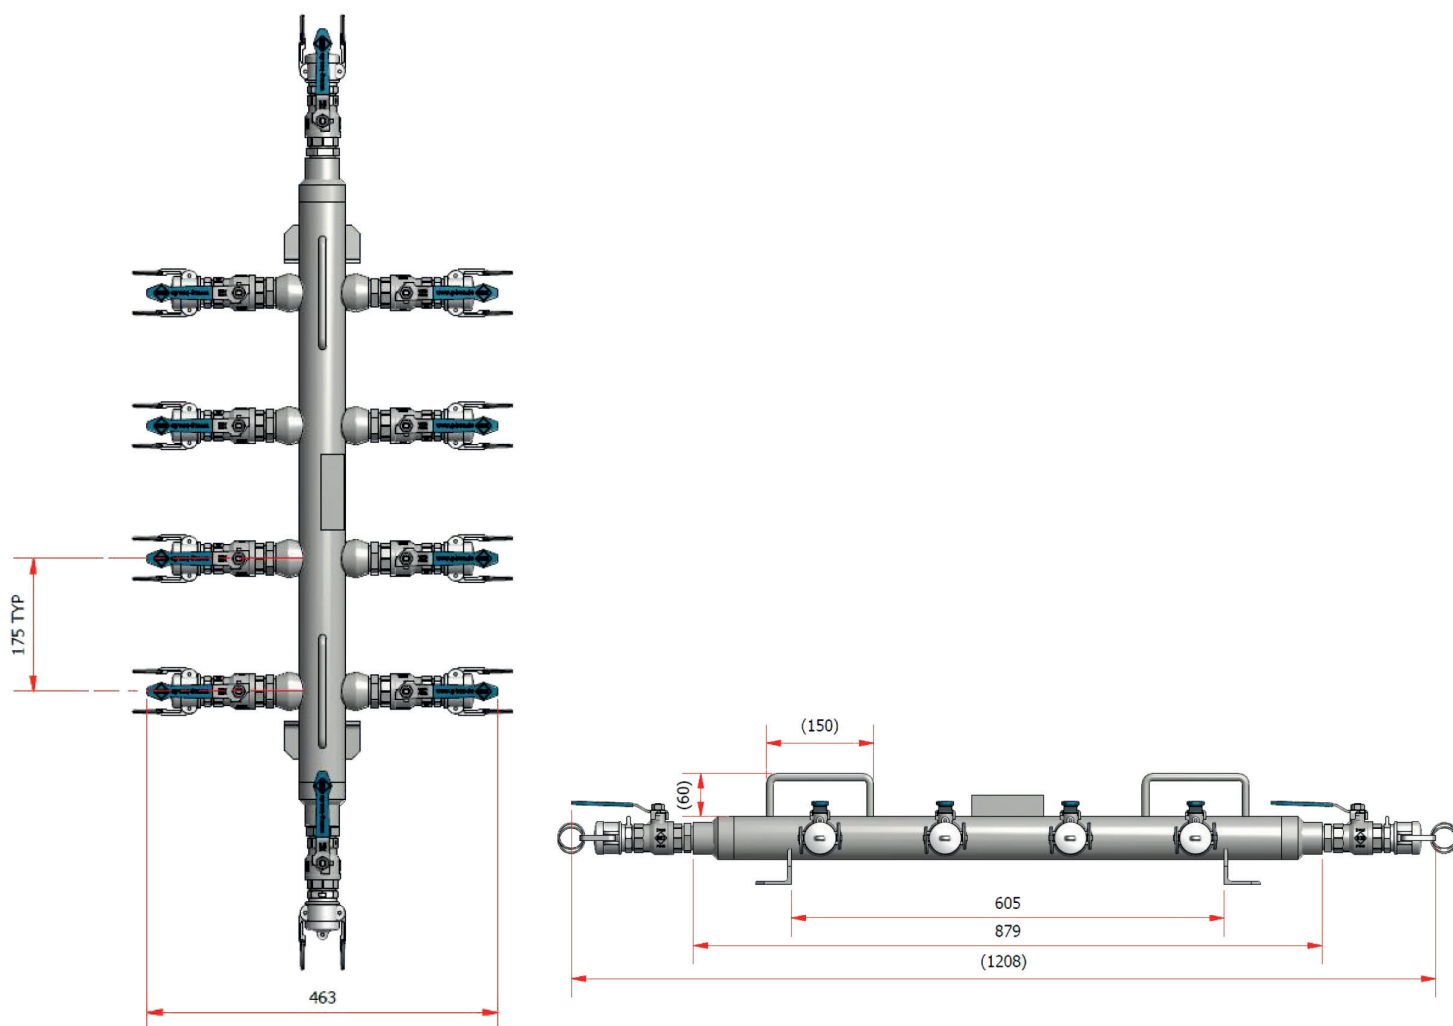

All information is correct at the time of printing. Brimmond reserves the right to make any changes to the above specification, without prior notice, with no impact on the overall unit performance.