


4" FLUID MANIFOLDS

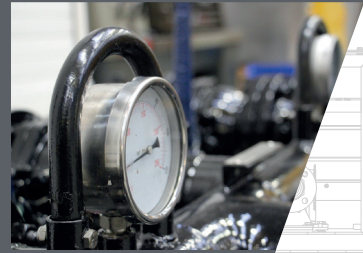

4" FLUID MANIFOLDS

Brimmond's range of lightweight, stainless steel fluid manifolds can be used either onshore or offshore for applications such as:

- Hot oil flushing
- Fluid transfer
- Pipeline flooding
- Well testing
- Tank cleaning

Brimmond offer a range of complimentary equipment for rental; contact our hire team to find out how we can help you. For special projects, we offer a bespoke design solution, tailored to your requirements.

Toftills Avenue, Midmill Business Park,
Kintore, Aberdeenshire, Scotland, AB51 0QP, UK

+44 (0) 1467 633805
info@brimmond.com



www.brimmond.com

TECHNICAL SPECIFICATION - STANDARD SUPPLY

NUMBER & TYPE OF VALVES	8 x 4" Class 150 full bore lever operated (number of valves configurable) 316SS ball and stem Fire safe and antistatic
PROCESS CONNECTIONS	Inlet: 4" hammer union - figure 1502 female (threaded) Outlets: 4" hammer union - figure 1502 male (wing)
PROCESS MEDIA	Fluid
PIPE SIZE	4" SCH 40 c/w ANSI B16.5 150lb flanges
MAXIMUM WORKING PRESSURE	290psi @ 37.8°C max
MOVING & HANDLING	Forklift pockets
DIMENSIONS	2593mm (L) x 1200mm (W) x 631mm (H)
WEIGHT	800kg

MAIN DIMENSIONS

