


1 1/4" HYDRAULICALLY DRIVEN SUBMERSIBLE PUMP

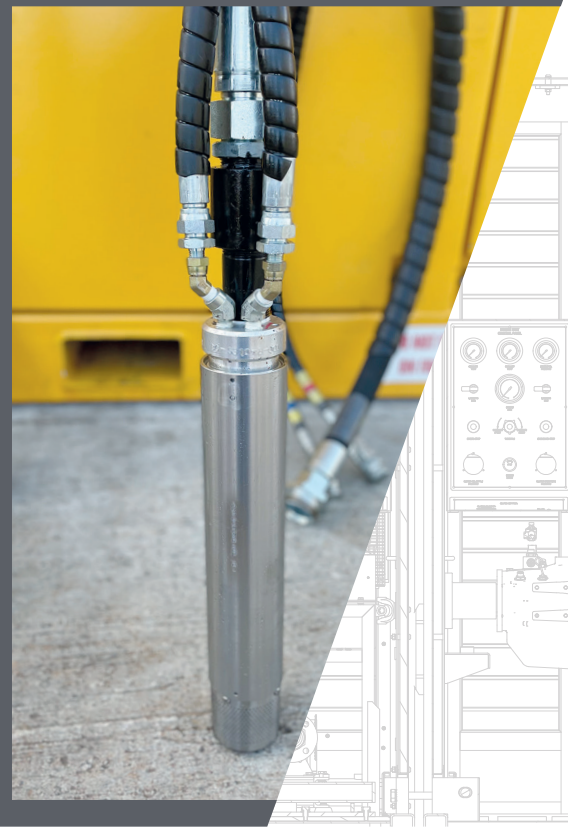

1 1/4" HYDRAULICALLY DRIVEN SUBMERSIBLE PUMP

Brimmond's hydraulically driven 1 1/4" pumps can be used either onshore or offshore to provide a pumping solution for:

- Seawater lift pump
- Temporary water retrieval
- Deballasting
- Confined space pumping
- Boost pump applications
- Tank emptying

Brimmond offer a range of complimentary equipment for rental; contact our hire team to find out how we can help you. For special projects, we offer a bespoke design solution, tailored to your requirements.

Tofthills Avenue, Midmill Business Park,
Kintore, Aberdeenshire, Scotland, AB51 0QP, UK

+44 (0) 1467 633805
info@brimmond.com



www.brimmond.com

WORK AREA CLASSIFICATION

CE Suitable for Safe Area

TECHNICAL SPECIFICATION - STANDARD SUPPLY

POWER SOURCE	Any open centre hydraulic system
HYDRAULIC SUPPLY REQUIREMENTS	Maximum pressure: 163 bar • Maximum flow: 23lpm
ELASTOMERS	Buna N
IMPELLER	Stainless steel
PUMP BODY	Seawater Resistant Aluminium
HYDRAULIC CONNECTIONS	Quick release couplings (client specified type) • Pressure: 1/2" • Return : 1/2"
SOLIDS HANDLING	70lbs (32kg)
INLET	4" (100mm)
DISCHARGE	1 1/4" NPT - Configured to client requirement
WEIGHT	Gross 4.5kg
DIMENSIONS	79mm (L) x 79mm (W) x 343mm (H)

MAIN DIMENSIONS

