


3" HYDRAULICALLY DRIVEN SUBMERSIBLE PUMP

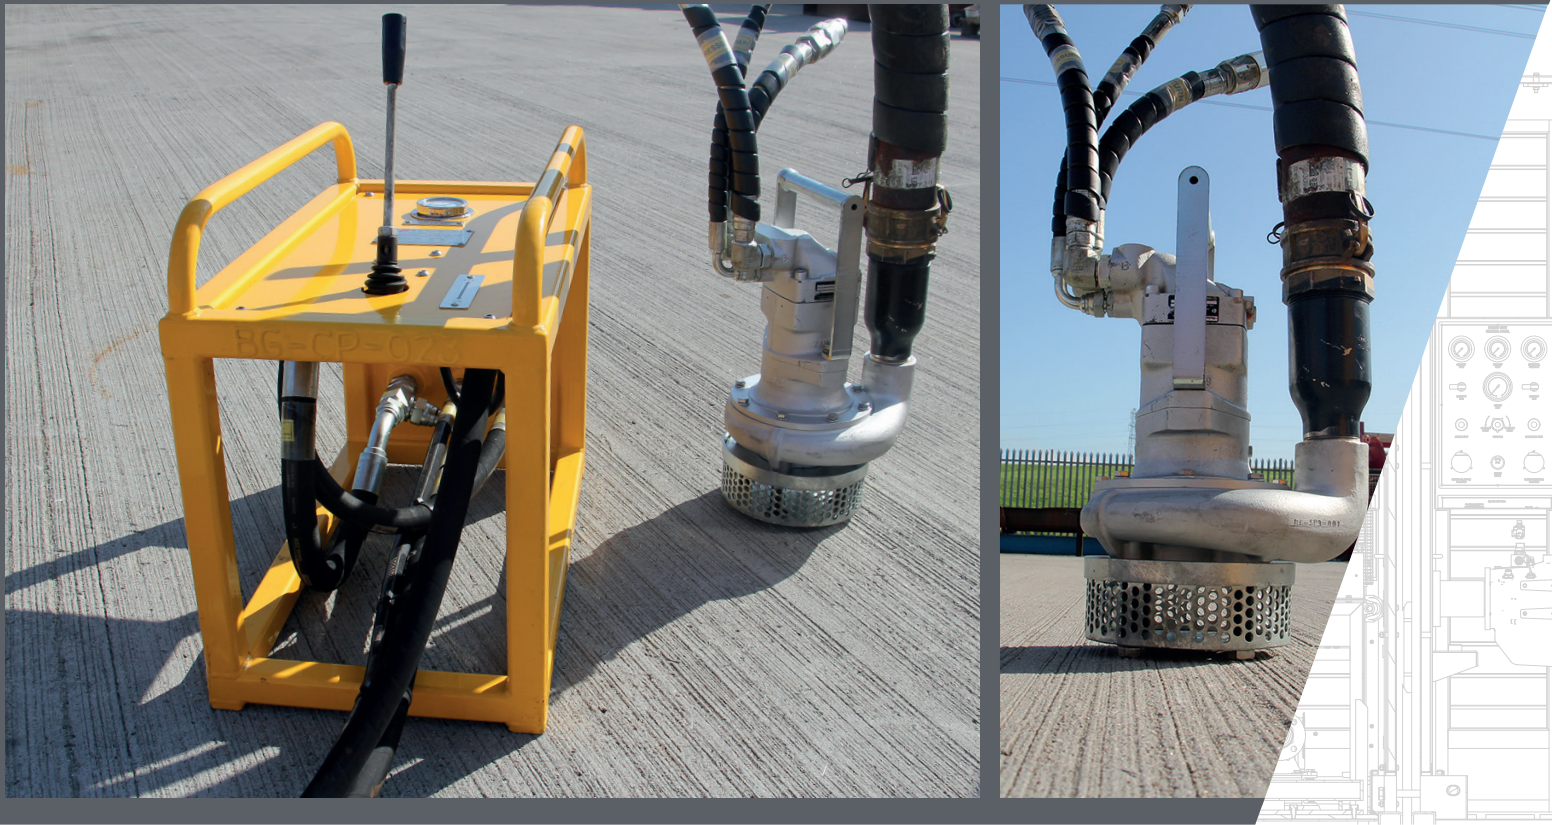

3" HYDRAULICALLY DRIVEN SUBMERSIBLE PUMP

Brimmond's hydraulically driven 3" pumps can be used either onshore or offshore to provide a pumping solution for:

- Seawater lift pump
- Temporary water retrieval
- Deballasting
- Confined space pumping
- Boost pump applications
- Tank emptying

Brimmond offer a range of complimentary equipment for rental; contact our hire team to find out how we can help you. For special projects, we offer a bespoke design solution, tailored to your requirements.

Tofthills Avenue, Midmill Business Park,
Kintore, Aberdeenshire, Scotland, AB51 0QP, UK

+44 (0) 1467 633805
info@brimmond.com



www.brimmond.com

WORK AREA CLASSIFICATION

CE Suitable for Safe Area

TECHNICAL SPECIFICATION - STANDARD SUPPLY

POWER SOURCE	Any open centre hydraulic system
HYDRAULIC SUPPLY REQUIREMENTS	Maximum pressure: 241 bar • Maximum flow: 114lpm
ELASTOMERS	Buna N
IMPELLER	Bronze
PUMP BODY	Ductile Iron
HYDRAULIC CONNECTIONS	Quick release couplings (client specified type) • Pressure: 3/4" • Return : 1" • Case Drain: 1/2"
SOLIDS HANDLING	3/8" (9.5mm)
INLET	3" 125#ASA
DISCHARGE	2" NPT Female - (configured to client requirement or 3" camlock as standard)
WEIGHT	Gross 40kg
DIMENSIONS	260mm (L) x 300mm (W) x 510mm (H)

MAIN DIMENSIONS

