

## OVERBOARD UMBILICAL CHUTE



## OVERBOARD UMBILICAL CHUTE

Brimmond's Overboard Umbilical Chutes can be used either onshore or offshore to provide a deployment solution for:

- **Hose deployment**
- **Cable deployment**

Brimmond offer a range of complimentary equipment for rental; contact our hire team to find out how we can help you. For special projects, we offer a bespoke design solution, tailored to your requirements.

Toftfills Avenue, Midmill Business Park,  
Kintore, Aberdeenshire, Scotland, AB51 0QP, UK

+44 (0) 1467 633805  
info@brimmond.com



www.brimmond.com


## WORK AREA CLASSIFICATION

UK & CE Safe Area classification


## TECHNICAL SPECIFICATION - STANDARD SUPPLY

DESCRIPTION	Overboard chute
DESIGN STANDARD	Design factor 2:1
MAXIMUM SW-LINE PULL	2500kg @ 90° Angle
UMBILICAL SIZE	Ø220mm (Maximum)
MINIMUM BEND RADIUS (MBR)	1400mm
OPERATING ANGLES	62°
GROSS WEIGHT	500kg
MOVING & HANDLING	Overhead lift (4 x padeyes suitable for 4.5Te shackle)
DIMENSIONS	2974mm (L) x 2040mm (W) x 1086mm (H) All dimensions are maximum

## MAIN DIMENSIONS

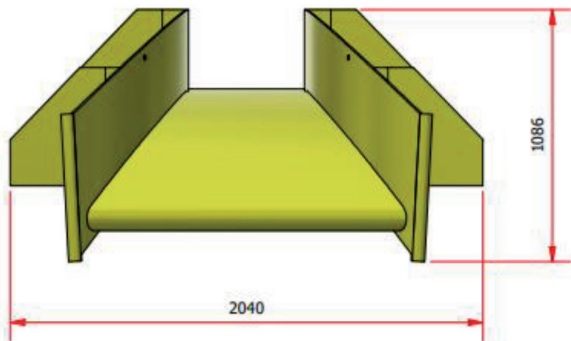

FRONT ELEVATION

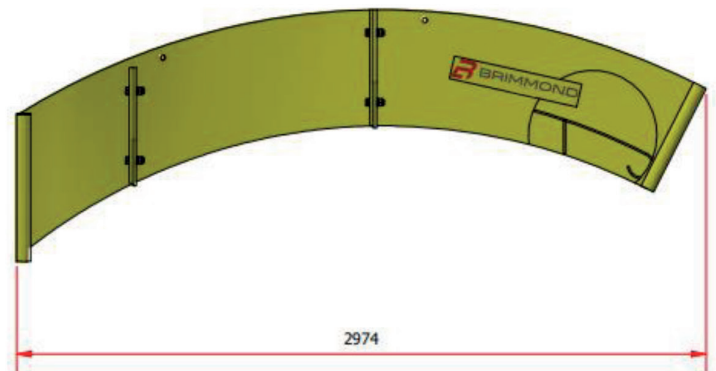

SIDE ELEVATION  
(2 PLCS)